

CEL-FI™

QUATRA 4000e Fiber Hub

In-Building Enterprise Cellular System




NEXTIVITY
Smarter by Design

Leveraging Fiber Connectivity for Enterprise



The Cel-Fi QUATRA 4000e Fiber Hub (fHub) expands the Network Unit capacity in QUATRA 4000e deployments from six to up to 12 Coverage Units. The fHub can be installed 2 km (1.2 miles) away from the NU to cover large spaces while maintaining the same signal quality throughout the system.

Industry-Leading Performance for Tall Structures, Campuses, and Multi-Building Installations

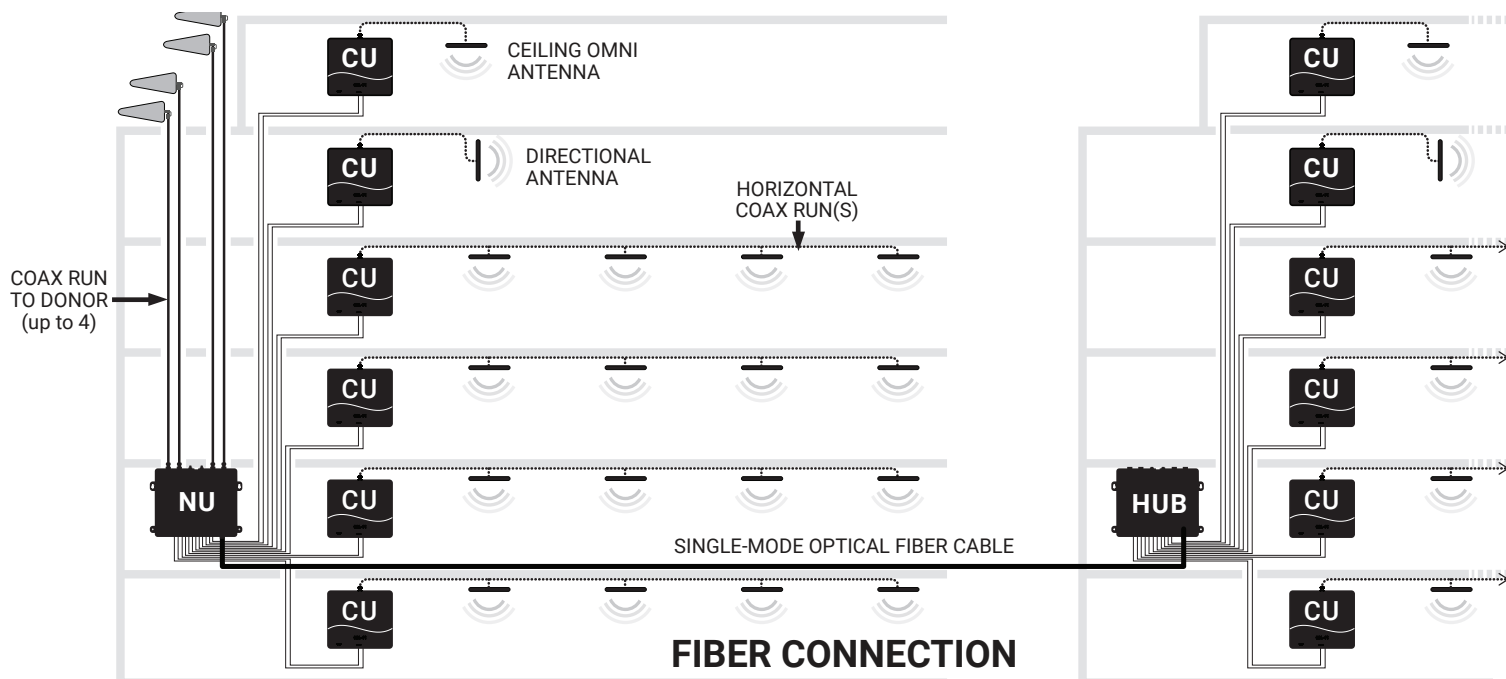

- **Multi-carrier Active DAS Hybrid**
- **Donor Source Over Fiber**
- **Ofcom and ComReg Approved**
- **SFP+ Module** (*not included*)



The award-winning,
carrier-grade
solution.

A Fiber Expansion Unit for Cel-Fi QUATRA 4000e

The fHub supports up to six Cel-Fi QUATRA 4000e Coverage Units (CUs). The Cel-Fi QUATRA 4000e Network Unit (NU) passes through the donor signal to the fHub via single or multi-mode fiber connection, supporting one NU to one fHub. The Cel-Fi QUATRA 4000e NU must be activated for Fiber via software. The SFP+ port on the NU connects to an aftermarket hot-pluggable SFP+ transceiver. The NU supports up to six CUs. Connected to the fHub, the NU can support an additional six CUs.




**Cel-Fi QUATRA 4000e
Fiber Hub**
(Q40-EFNU)

Hardware:



**Cel-Fi QUATRA 4000e
Network Unit**
(Q44-E999CNU)



**Cel-Fi QUATRA 4000e
Coverage Unit**
(Q41-EECU)



**Cel-Fi QUATRA 4000
Range Extender**
(Q40-OE)

	PRODUCT	BANDS
INTEGRATION MODELS	Cel-Fi QUATRA 4000e	1/3/7/8/20/40

SPECIFICATIONS			
HUB SUPPORT (OPTICAL)	SFP+	Duplex LC Connector	
		1310 nm	
NU FIBER INTERFACE	Optical	8.5%	16-QAM with full RB allocation
		8.5%	E-TM3.1
POWER	Hub Internal Supply	Voltage (VAC)	100–240
		Power - Typical (W)	200
		Power - Max (W)	321.3
SUPPORTED CUS	Coverage Units	Number Supported (Max)	6
		Category Cables per CU	2
		Interface Type	RJ45
USER INTERFACE	Power / Status	LED	RED / GREEN
	CU Link (1-6)	LED	GREEN
	Cellular Modem	LED	OFF (See NU for Status)
	Ethernet	LED	OFF (See NU for Status)
MECHANICAL	Dimensions	L x W x H (mm)	330 x 272 x 85
	Weight (kg)		6.5
	Mounting	Wall or Rack	Yes
	Cooling	Convection	Yes
	Power Supply	Internal with C13 Cord	Yes
ENVIRONMENTAL	Power Switch	On/Off Switch (Housing Mount)	Yes
	Maximum Surface Temperature	Measured at 30°C Ambient	44°C

Antennas:

Cel-Fi Blade Antenna

Included with Cel-Fi QUATRA 4000e CU
(A62-V44-200)



Cel-Fi LPDA-R High-Gain Directional Antenna

(A62-V44-200)



Cel-Fi Low-Profile Antenna

(A11-H43-201)



Copyright © 2022 by Nextivity, Inc. U.S. Patents pending. All rights reserved. The Nextivity and Cel-Fi logos are registered trademarks of Nextivity Inc. All other trademarks or registered trademarks listed belong to their respective owners. Designed by Nextivity Inc in California. brief_q4000e-fiber-hub_22-0915